

TELEPHONE PART

Modular Plugs Series

KLS12-MP02-CAT6-8P8C

MATERIAL


1. Housing :Polycarbonate(pc) UL 94V-0 or UL 94V-2
2. Contact :Phosphor Bronze,Hard Gold plated over nickel
- 3.Shieldingjg:0.25mm Thickness Copper Alloy With Tin plated
- 4.Gold plating:3u inch,6u inch,15u inch,30u inch,50u inch

ELECTRICAL

- 1.Current Rating:1.5 Amps
- 2.Voltage Rating:125 Volts AC
- 3.Insulation Resistance:100 Megohms Min.
- 4.Contact Resistance:39 Millmhos Max.
- 5.Withstanding Voltage:1000VAC RMS 50Hz or 60Hz 1 Min.

MECHANICAL

CABLE TO PLUG TENSILE STRENGTH:7.7Kg MINI
DURABILITY:750MATING CYCLES MINI
WORKING TEMPERATURE:-40°C ~60°C

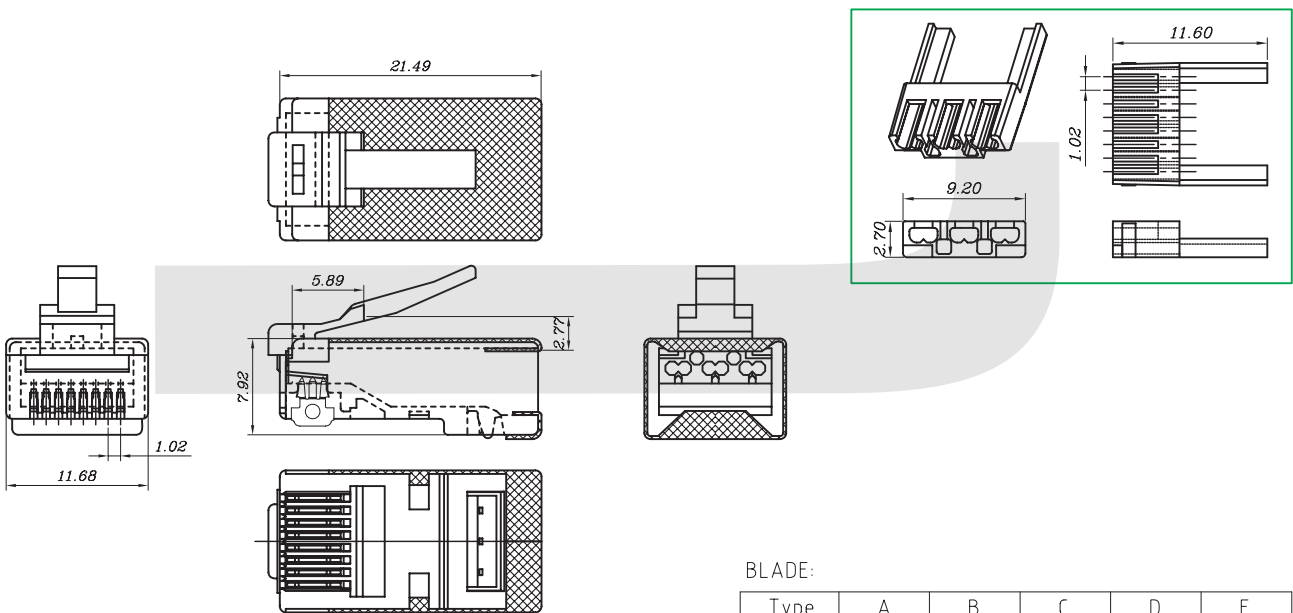

BLADE:

| Type | A | B | C | D | E |
|---------|---|---|---|---|---|
| Drawing | | | | | |

ORDER INFORMATION

KLS12-MP02-CAT6 - 8P8C XX - X X X X

Part Number

| Point NO. | Gold Thickness | Blade style | Color | Shielded | Shell |
|------------|----------------|-------------|----------------------|-----------------|----------------|
| 8P8C Point | 01-Fu" | 1=A Type | Transparent or other | 0=No shielded | 1=Steel |
| 8P6C Point | 02-3u" | 2=B Type | | 1=With shielded | 2=Copper Shell |
| 8P4C Point | 03-6u" | 3=C Type | | | |
| 8P2C Point | 04-15u" | 4=D Type | | | |
| | 05-30u" | 5=E Type | | | |
| | 06-50u" | | | | |