

TERMINAL BLOCK Connector

Pluggable Series

KLS2-EDKFM-3.81 Series Pitch=3.81mm

Electrical :



Rated voltage: 300V
 Rated current: 8A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC2000V/1Min

Material



Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
 MAX Soldering: +250°C for 5 Sec

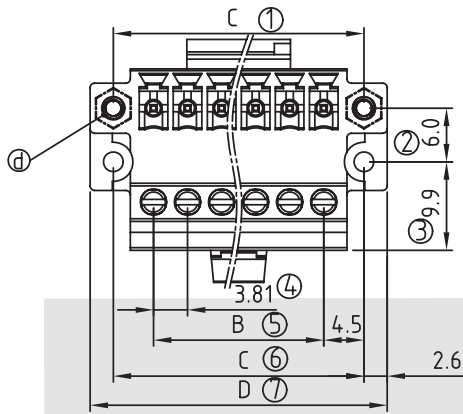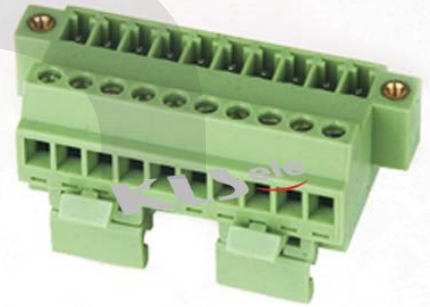

N = Number of poles
 Dim A = $N \times 3.81 + 1.39$
 Dim B = $(N - 1) \times 3.81$
 Dim C = $N \times 3.81 + 5.19$
 Dim D = $N \times 3.81 + 10.39$

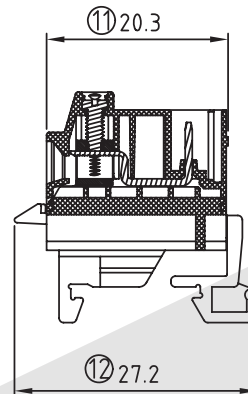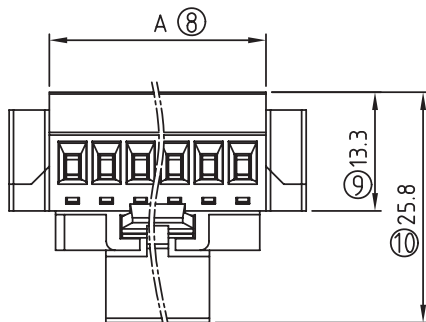

ORDER INFORMATION

Product NO.: KLS2-EDKFM-3.81-XXP X X X

Pos. NO.	Series No.	Pitch: 3.81=3.81mm	Number of Pole	Customer Request	Screw: C=Cross Screw S=Slot Screw	Color: 1=Gray 4=Green 7=Transparent	2=Blue 5=Orange 8=Yellow	3=Black 6=Red 9=White
----------	------------	--------------------	----------------	------------------	--------------------------------------	---	--------------------------------	-----------------------------