


## Cable Gland Series

### KLS8-0613 Nylon Cable Gland Series

Material: UL approved Nylon 66, 94V-2 (Black)  
Well designed for insulation, waterproof and impact resistant.  
Used extensively for protection and fixation of cables in control panel and apparatus.

- Application:
1. Mount body to pre-drilled panel hole and fix it with locking nut.
  2. Insert cables through body and then seals consequently.  
Finally, Press them together with press nut to hold cable in position.

Unit:mm

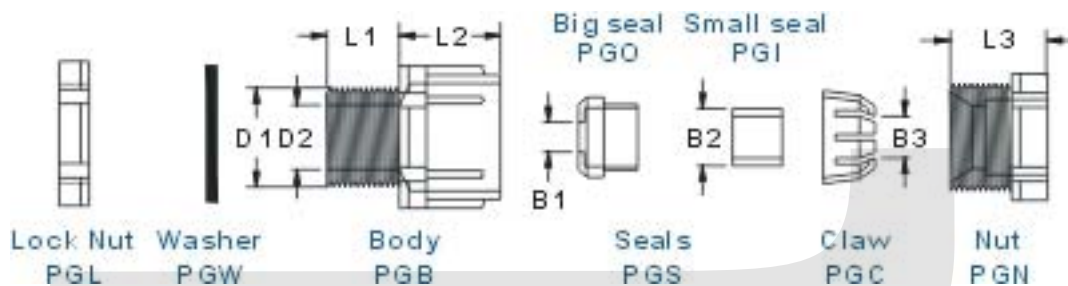

Item No.	D1	D2	B1	B2	B3	L1	L2	L3	Cable Range	Packing
PG-16	16	10.5	.	7	10	12	17	16.5	5~10	50pcs
PG-20	20	13.7	.	9	13	13	19	19.5	6~13	
PG-25	25	18.5	.	11	17	13	22	21	10~18	
PG-32	32	25	.	15	20	15	24.5	24.5	16~22	25pcs
PG-40	40	32	22	27	31	21	26.5	27.5	20~27	10pcs
PG-50	50	41.5	32	36	41	23	30	31	30~41	
PG-63	63	53.2	43	43	51	25	33	33	40~53	

## ORDER INFORMATION

KLS8-0613 - PG-16

