


Switch

Slide Switch Series


KLS7-SK31-22F02 (2P2T) Slide Switch Series

SPECIFICATIONS


- Rating: 0.5A 50VDC
- Contact Resistance: 30mΩ Max
- Insulation Resistance: 500VDC 100MΩ Min
- Dielectric Strength: 500V AC 1 Minute
- Operating Force: 100gf~800gf
- Electrical Life : 10,000 cycles

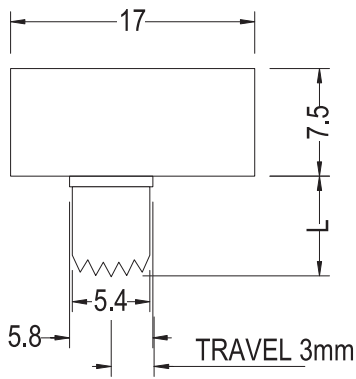

SCHEMATIC




開關型號	高度(H)	端子(W)
SK31-22F02	9	1
SK31-22F03	10	1
SK31-22F05	11	0.9
SK31-22F07	14	1.3
SK31-22F08	18	1.3
SK31-22F09	21	1.3
SK31-22F10	12	1.3
SK31-22F12	8	1
SK31-22F16	8.5	1
SK31-22F17	9.5	1

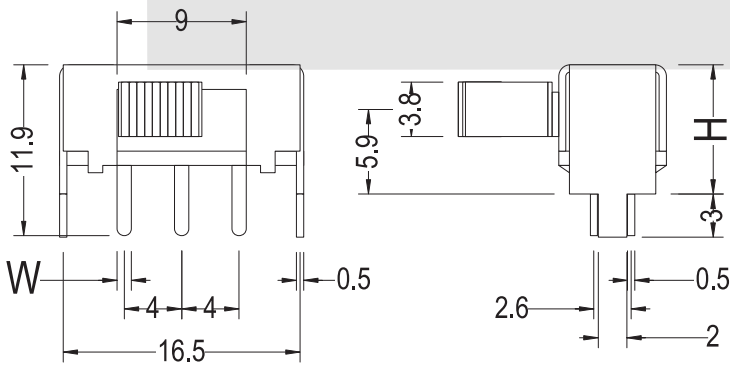

H : 本體高度
W : 端子寬度

P.C.B. HOLE DETAIL



ORDER INFORMATION

KLS7-SK31 - 2 2 F 02 - X X - X

- Part Number
- Slide Switch Type
- Pole
- Throw
- Operating Force
- Knobe Height
- Sequential No.

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

