


A

A

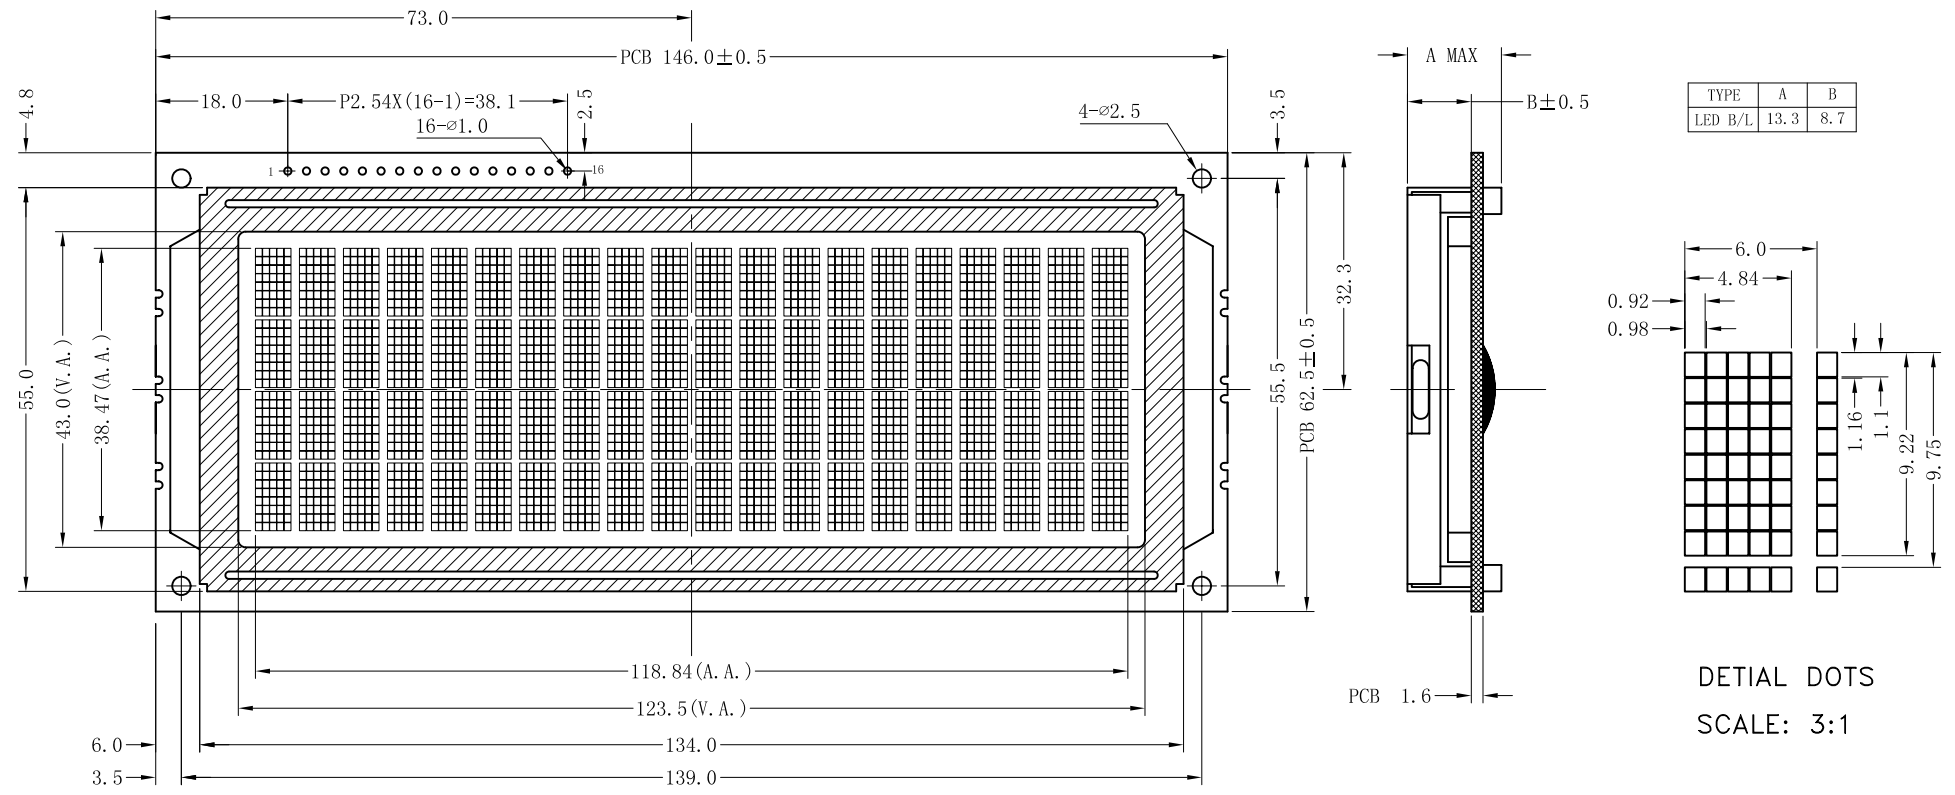

TYPE	A	B
LED B/L	13.3	8.7

DETAIL DOTS
SCALE: 3:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VCC	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED-	LED+

↑
VIEWING

SPECIFICATIONS

- DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE
- LCD DRIVING VOLTAGE: 5.0V
- LOGIC VOLTAGE: 5.0V
- VIEWING DIRECTION: 6 O'CLOCK
- OPERATING TEMP: -10° C~+60° C
- STORAGE TEMP: -20° C~+70° C
- DRIVE MODE: 1 / 16 DUTY, 1 / 5 BIAS
- BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
- OTHER:
- MECHANICAL TOL. ± 0.3 UNLESS SPECIFIED

NOTE:

DESCRIPTION: C/D

SCALE: FIT			
SHEET: 1 OF 1			
	PROJECTION	MODEL	SERIAL NUMBER
UNIT:	mm	TC2004B-02	MLX2707
APP:		CHK:	DWN:
DATE:		DATE:	DATE:

D

D