

## Stereo Jack Series


### KLS1-SPJ2.5-006 (SMD Stereo Jack)

**Technical parameters:**

Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03Ω, max  
 Insulation resistance: 100MΩ, min  
 Pressure: AC500V (50Hz) / 1minute  
 Insertion Force :2-20 N  
 Life: 50000 times  
 Operating Temperature:-30°C ~ 70°C

**Material:**

- Terminal 1 : Copper Alloy
- Terminal 2 : Copper Alloy
- Terminal 3 : Copper Alloy
- Terminal 4 : Copper Alloy
- Terminal10 : Brass
- Terminal11 : Brass
- Housing : PA6T
- Cover : PA6T

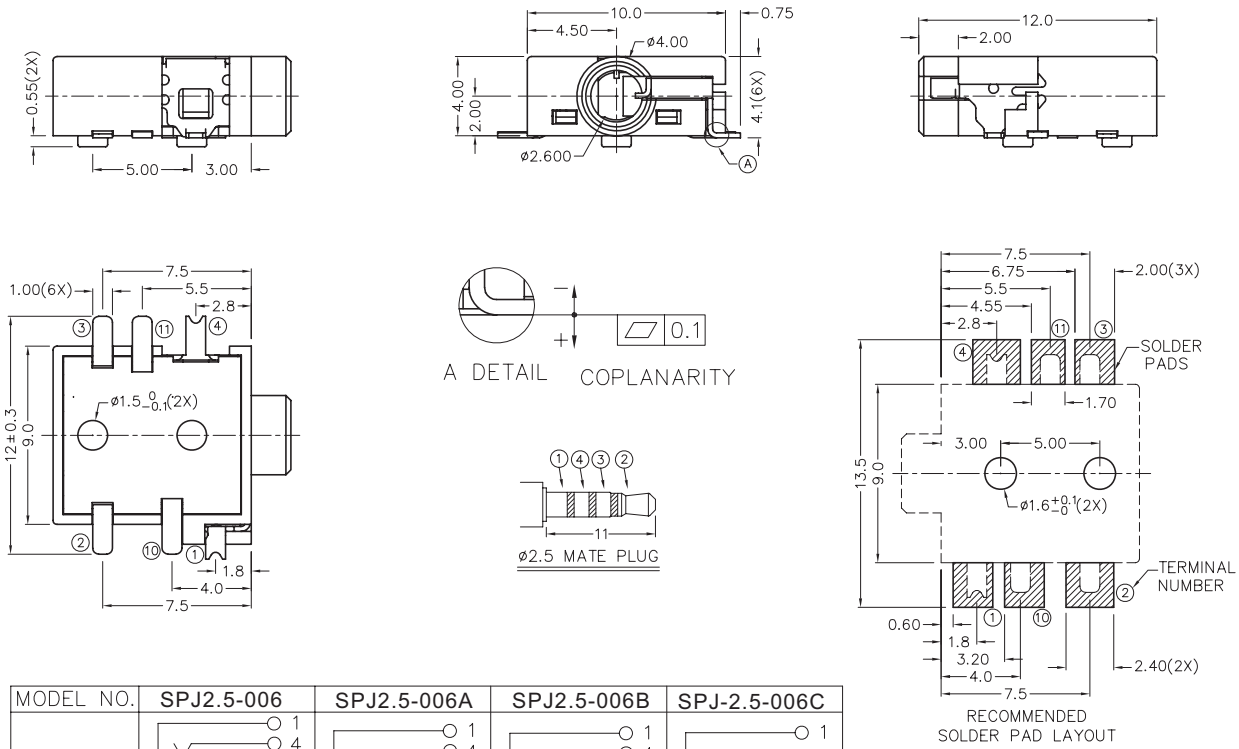

MODEL NO.	SPJ2.5-006	SPJ2.5-006A	SPJ2.5-006B	SPJ-2.5-006C
SCHEMATIC				

## ORDER INFORMATION

Product NO.: **KLS1-SPJ2.5-006A**

