

Stereo Jack Series

KLS1-TPJ2.5-002 (SMD Stereo Jack)

Technical parameters:



Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

Terminal 1 :Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 10 : Barss
 Housing : PA6T



I

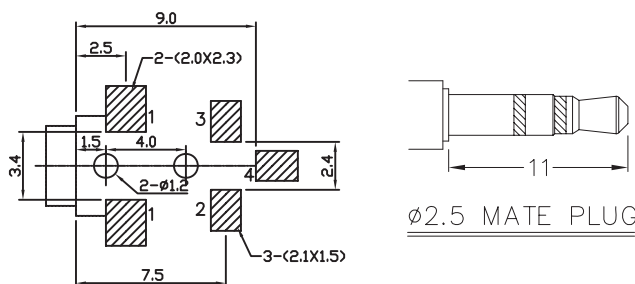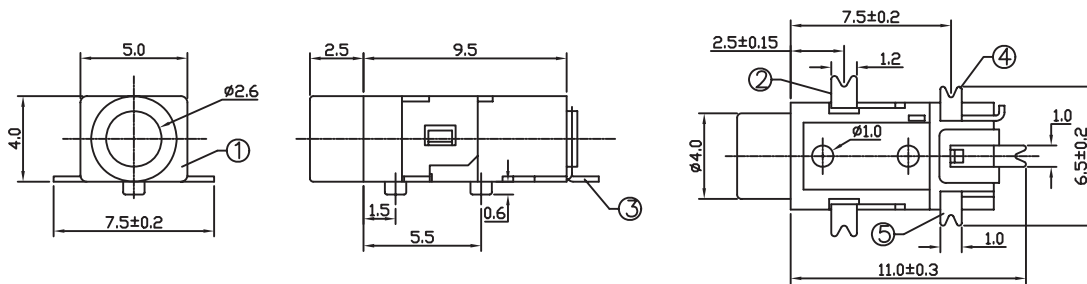

TPJ2.5-002	TPJ2.5-002A	TPJ2.5-002B

ORDER INFORMATION

Product NO.: KLS1-TPJ2.5-002A

