

Stereo Jack Series

I





KLS1-TSJ2.5-005 (Dip Stereo Jack)

Technical parameters:

- Rated voltage: DC 30 V
- Rated current: 0.5 A
- Contact resistance: 0.03Ω, max
- Insulation resistance: 100MΩ, min
- Pressure: AC500V (50Hz) / 1minute
- Insertion Force :2-20 N
- Life: 50000 times
- Operating Temperature:-30°C ~ 70°C

Material:

- Terminal 1 :Brass
- Terminal 2 :Copper Alloy
- Terminal 3 :Copper Alloy
- Terminal 4 :Copper Alloy
- Bushing :Brass
- Housing :PBT

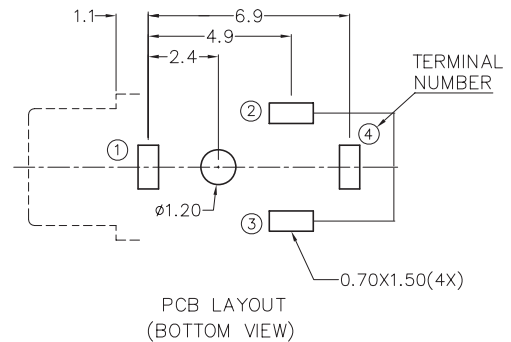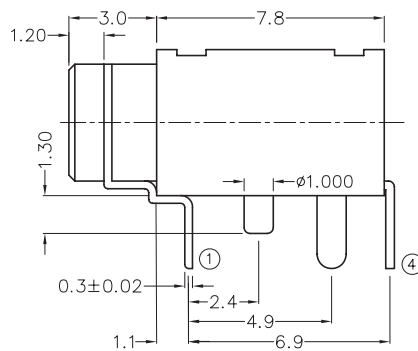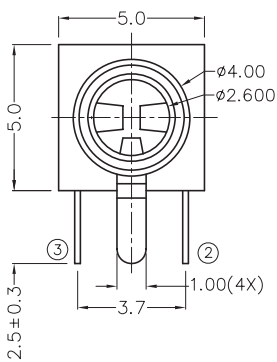

MODEL NO.	005
SCHEMATIC	

ORDER INFORMATION

Product NO.: KLS1-TSJ2.5-005

