



Stereo Jack Series




KLS1-TG3.5-001B (Dip Mono Jack)

Technical parameters:

Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

Housing Material:PBT
 Center Pin Material:
 Terminal 1 :Brass
 Terminal 2 :Copper Alloy
 Terminal 3 :Brass
 Bushing :Brass

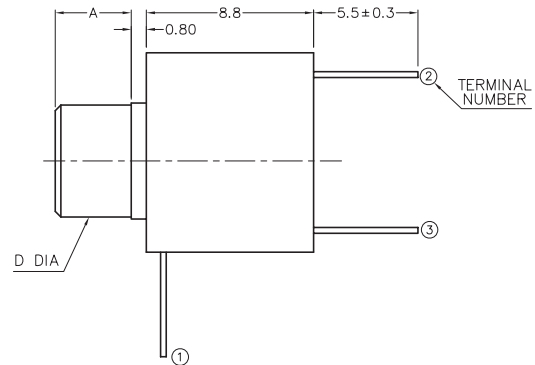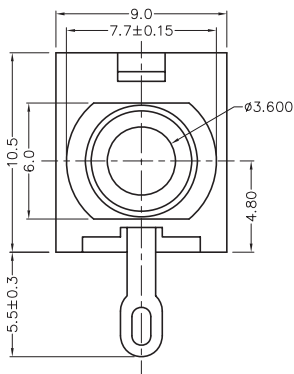

MODEL NO.	TG3. 5-001B	TG3. 5-001BA	TG3. 5-001BB
D DIA	Without NUT ϕ6.0	Without NUT ϕ6.0	Without NUT ϕ5.5
A	3.0mm	4.0mm	4.5mm
SCHEMATIC			

ORDER INFORMATION

Product NO.: KLS1-TG3.5-001BA

