

## Stereo Jack Series



### KLS1-TSJ3.5-002A (Dip Stereo Jack)

**Technical parameters:**

Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03Ω, max  
 Insulation resistance: 100MΩ, min  
 Pressure: AC500V (50Hz) / 1minute  
 Insertion Force :2-20 N  
 Life: 50000 times  
 Operating Temperature:-30°C ~ 70°C

**Material:**

CONTACT CLIP : C5210R-EH AG CLAD  
 Housing-A, Housing-B, INSULATOR, PIN BOARD: PA66  
 Terminal 1 : Copper Alloy  
 Terminal 2 : Copper Alloy  
 Terminal 3 : Copper Alloy  
 Terminal 10: Brass  
 Terminal 11: Brass  
 Terminal 4, 5, 6 : Brass  
 Bushing : Brass  
 Housing : Brass

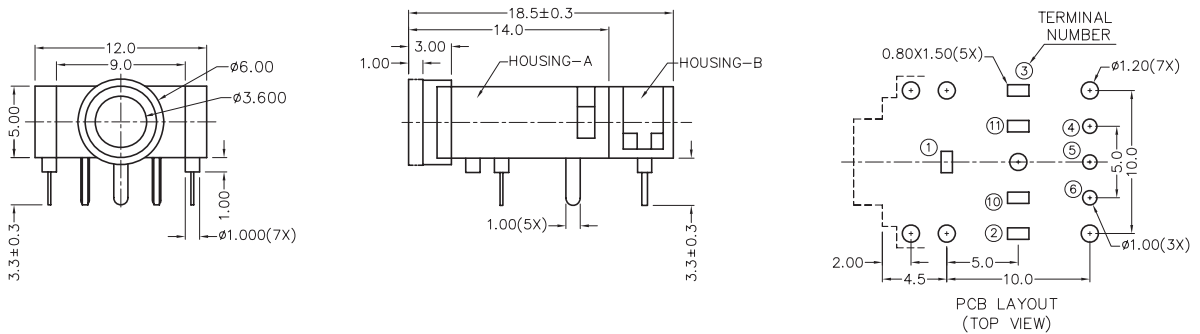

MODEL NO.	TSJ3.5-002A	TSJ3.5-002AA	TSJ3.5-002AB	TSJ3.5-002AC	TSJ3.5-002AD	TSJ3.5-002AE
SCHEMATIC						

## ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-002AA

