

Stereo Jack Series


KLS1-SSJ3.5-008 (Dip Stereo Jack)

Technical parameters:

Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

- Terminal 1 : Copper Alloy
- Terminal 2 : Copper Alloy
- Terminal 3 : Copper Alloy
- Terminal 4 : Copper Alloy
- Terminal 5 : Copper Alloy
- Terminal 6 : Copper Alloy
- Terminal 10: Brass
- Housing : Pa66

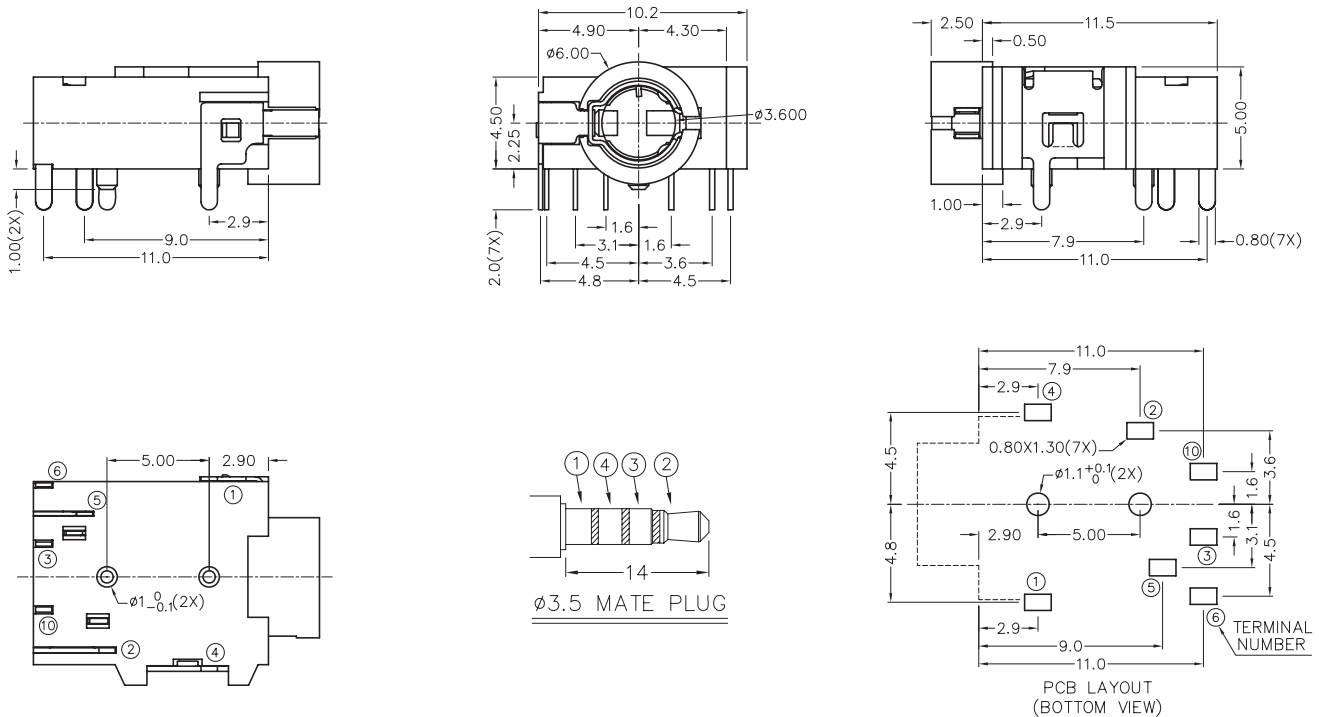

MODEL NO.	SSJ3.5-008	SSJ3.5-008A	SSJ3.5-008B	SSJ3.5-008C
SCHEMATIC	○1	○1	○1	○1
	○4	○4	○4	○4
	○2	○2	○2	○2
	○10	○10	○10	○10
	○3	○3	○3	○3
	○5	○5	○5	○5
	○6	○6		

ORDER INFORMATION

Product NO.: KLS1-SSJ3.5-008A

