

## Stereo Jack Series


### KLS1-TSJ3.5-003A (Dip Stereo Jack)

#### Technical parameters:

Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03Ω, max  
 Insulation resistance: 100MΩ, min  
 Pressure: AC500V (50Hz) / 1minute  
 Insertion Force :2-20 N  
 Life: 50000 times  
 Operating Temperature:-30°C ~ 70°C

#### Material:

Terminal 1 : Cold Rolled Steel  
 Terminal 2 : Copper Alloy  
 Terminal 3 : Copper Alloy  
 Terminal 10: Brass  
 Terminal 11: Brass  
 Bushing : Brass  
 Spring : Copper Alloy  
 Housing : PBT  
 Cover : PTB

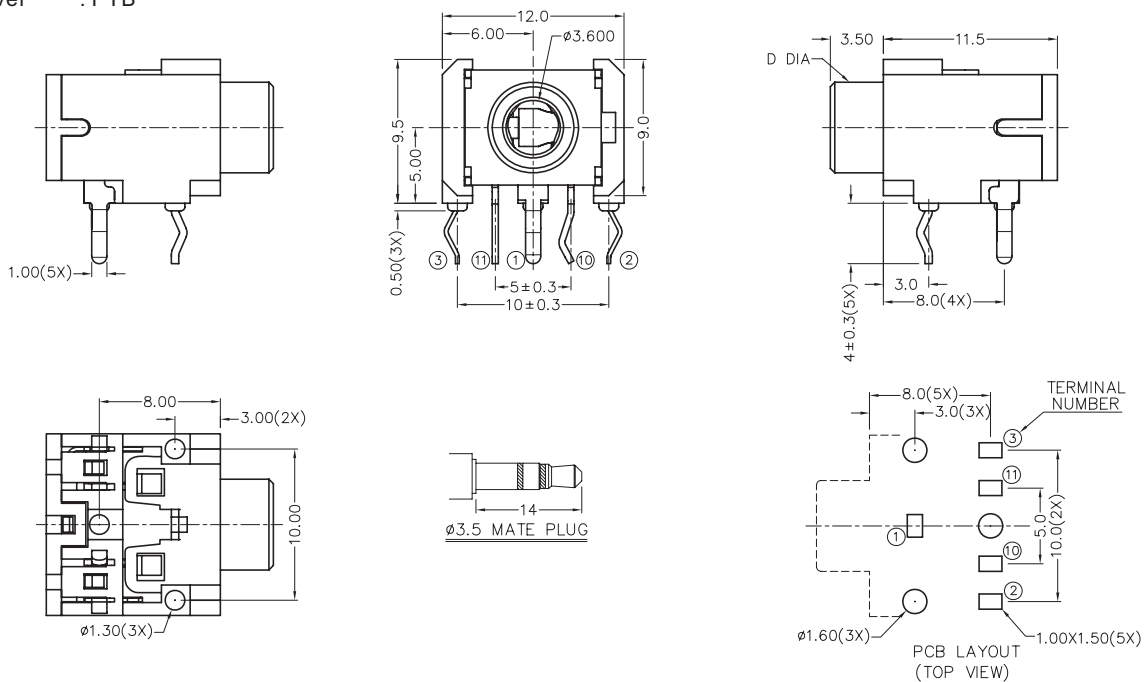

With NUT	M6X0.5	MODEL NO.	TSJ3.5-003A	TSJ3.5-003AA	TSJ3.5-003AB	TSJ3.5-003AC	TSJ3.5-003AD
D DIA		SCHEMATIC					

## ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-003AA

Pos. NO. ————  
 3.5mm Dip Stereo Jack ————  
 Schematic: See Annex  
 A: With NUT  
 B: Without NUT