

## Stereo Jack Series



KLS1-TSJ3.5-005B (Dip Stereo Jack)

### Technical parameters:

Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03Ω, max  
 Insulation resistance: 100MΩ, min  
 Pressure: AC500V (50Hz) / 1minute  
 Insertion Force :2-20 N  
 Life: 50000 times  
 Operating Temperature:-30°C ~ 70°C

### Material:

Housing -A/B/INSULATOR/PIN BOARD:PA66  
 Contact Clip: C5210r-EH AG CLAD  
 Center Pin Material:  
 Terminal 1,2,3 : Copper Alloy  
 Terminal 4,5,6,7,8,9,10,11 : Brass

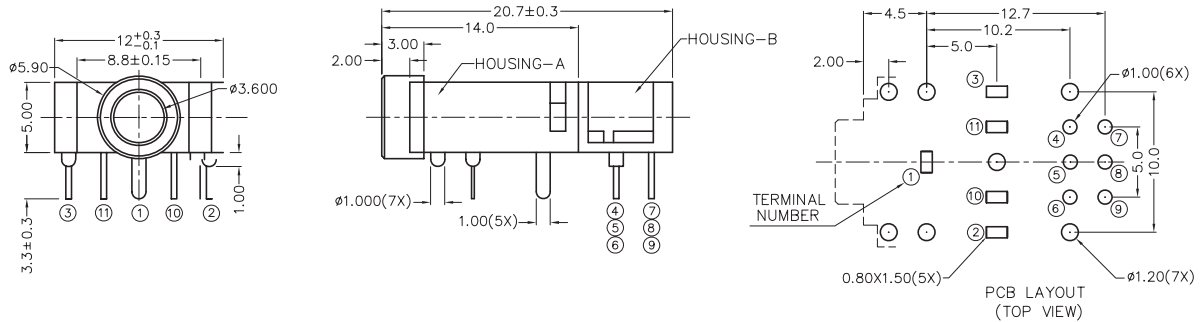

MODEL NO.	TSJ3.5-005B	TSJ3.5-005BA	TSJ3.5-005BB	TSJ3.5-005BC	TSJ3.5-005BD	TSJ3.5-005BE
SCHEMATIC						

## ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-005BA

