

RCA JACK Series





KLS1-RCA-205 PIN Jack+S PCB Mount R/A Jack

Electrical Specification:

Contact resistance : 30mΩ Max
 Insulation resistance : 50MΩ Min at DC 500V
 Withstand voltage : AC 500V(50Hz) 1min
 Operating Temperature : -25°C~+85°C

Materials

Shielded Plate : Steel
 Earth Fitting : Brass
 Terminal : Brass
 Housing : PBT UL94V~0
 Washer : ABS UL94V~0
 Outer Contact : Brass
 Ground Contact : Brass
 Center Contact : Brass

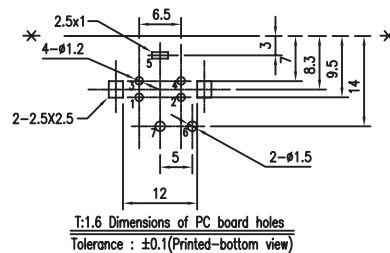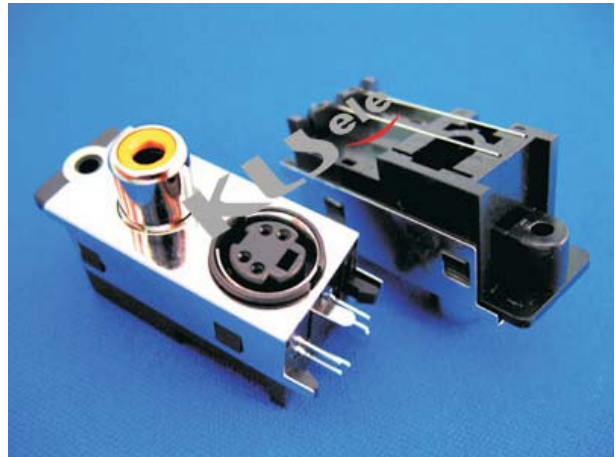

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

| | | |
|-----------|---------|----------|
| MODEL NO. | RCA-205 | |
| | S JACK | PIN JACK |
| SCHEMATIC | | |

ORDER INFORMATION

Product NO.: KLS1-RCA-205-N-R

Pos. NO. _____
 RCA Jack Type _____
 N:Nickel Plated _____
 Color: R: Red
 B: Black
 Y: Yellow
 W: White