
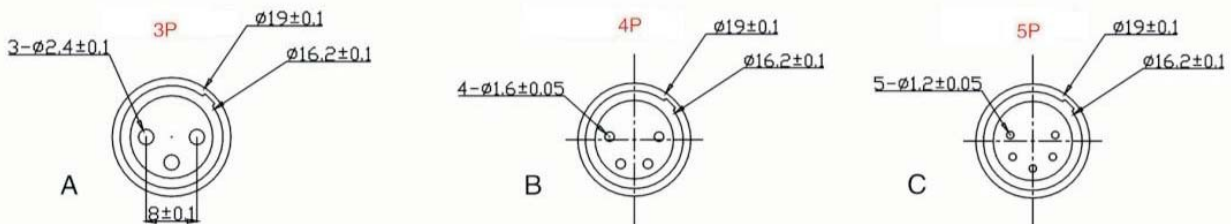
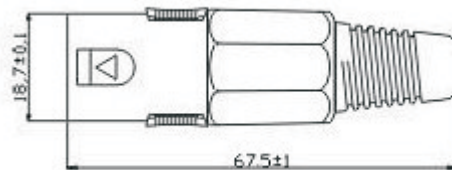
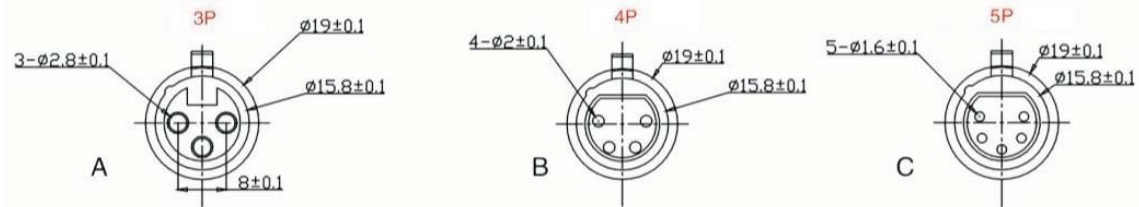


## XLR CONNECTOR SERIES

### KLS1-XLR-P04 (XLR Plug)

#### Electrical Specification:

Number of contacts: 3  
 Contact Resistance:  $\leq 3$  mOhms  
 Insulation Resistance Initial:  $> 2$  GOhms  
 After Damp Heat Test:  $> 1$  GOhms  
 Dielectric Strength: 1500 V dc  
 Rated current: 16 A  
 Mechanical Lifetime:  $> 1000$  cycles  
 Insertion / Withdrawal Force:  $\leq 20$  N  
 Cable O.D. Range: 4.0 mm - 8.0 mm  
 Temperature Range:  $-30^{\circ}$  C to  $+80^{\circ}$  C

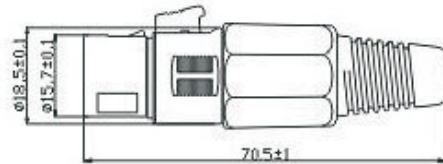

## ORDER INFORMATION

Product NO.: KLS1-XLR-P04-03-F-B

Pos. NO. \_\_\_\_\_ R=Red B=Black W=White  
 XLR Jack series \_\_\_\_\_ F=Female M=Male  
 03=3PIN of 03-07PIN

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information