

## MINI DIN JACK Series

KLS1-156A Mini Din Jack

### Material:

Base:PBT UL 94V-0

Round:Yellow with copper

Insert Pin:Phosphor Bronze

### Environmental:

Environment temperature:-25°C ~ + 70°C

Relative humidity:95% (40°C)

### Electrical:

Rated load:2A 12V DC



Contact Resistance:≤30mΩ

Insulation resistance:≥100MΩ

Pressure:250V AC (50Hz) 1min

Insertion force:5-35N

Operating life:5000 times

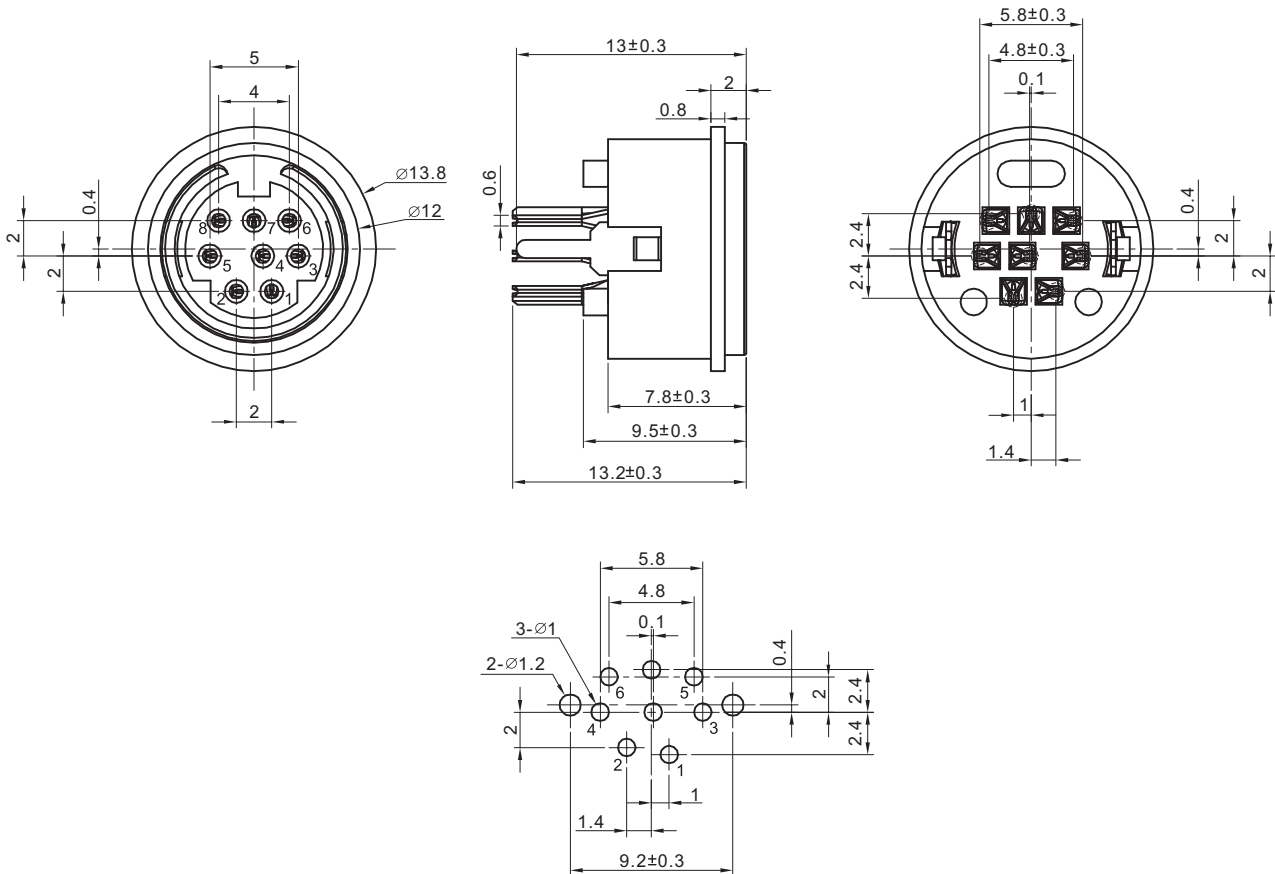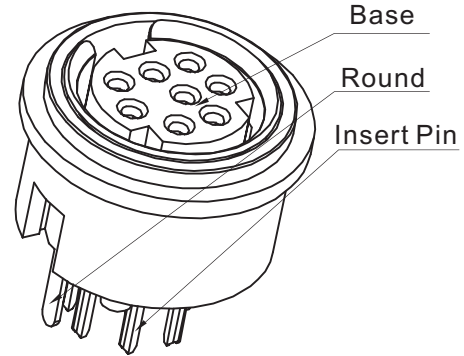

## ORDER INFORMATION

Product NO.: L-KLS1-156A-8-B

Pos. NO. ———— Color: B = Black  
MINI DIN Jack Right Angle Single Type ———— Pin Number  
3-3P 4-4P 5-5P 6-6P 7-7P 8-8P