	KLS23-B3657M	Output Power: 5W~60W	Weight: 220g (Approx.)
<p>Brushless DC Motor-Typical Application</p> <p>Home Application: White Goods, Small Appliance, Fanner, Coffee Machine, Milk Tea Machine</p> <p>Medical Apparatus: Medical Pump, Surgery Tools, Medical Stirrer, centrifugal Machine</p> <p>Power Tools: Screwdriver, Drill, Air Compressor</p> <p>Business Equipment: Printer, Copier, Projector, ATM, Vending Machine</p> <p>Personal Care: Hair Dryer, Electric Shaver, Massager</p>			


Model	Voltage(V)		No Load		Rated Load				Starting	
	Operating Range	Rated	Speed (rpm)	Current (A)	Torque (mNm)	Speed (rpm)	Current (A)	Output P. (W)	Torque (mNm)	Current (A)
B3657M-S01	8-26	12	3170	0.26	29.4	2460	1.15	7.6	181.5	6.00
B3657M-S02	8-26	12	3100	0.24	40.22	2560	1.31	10.78	215.8	6.00
B3657M-S03	8-26	24	6830	0.34	40.20	6134	1.48	25.80	195.0	6.00
B3657M-S04	8-26	24	5390	0.24	98.10	3680	2.51	37.76	249.9	6.00

Characteristic: CW & CCW, Signal function available, Locked rotor protection, Stepless speed regulation, Low noise, Low EMI, Long life 10000-50000hrs

Notice: Data in this typical specification sheet are for other certain customer. Voltage, rated torque, speed, current, power and shaft extension feature & dimension can be changed to meet customer specific requirement.

Outline Drawing: Usable machine screw length 4.0mm max from motor mounting surface

Unit: Millimeter

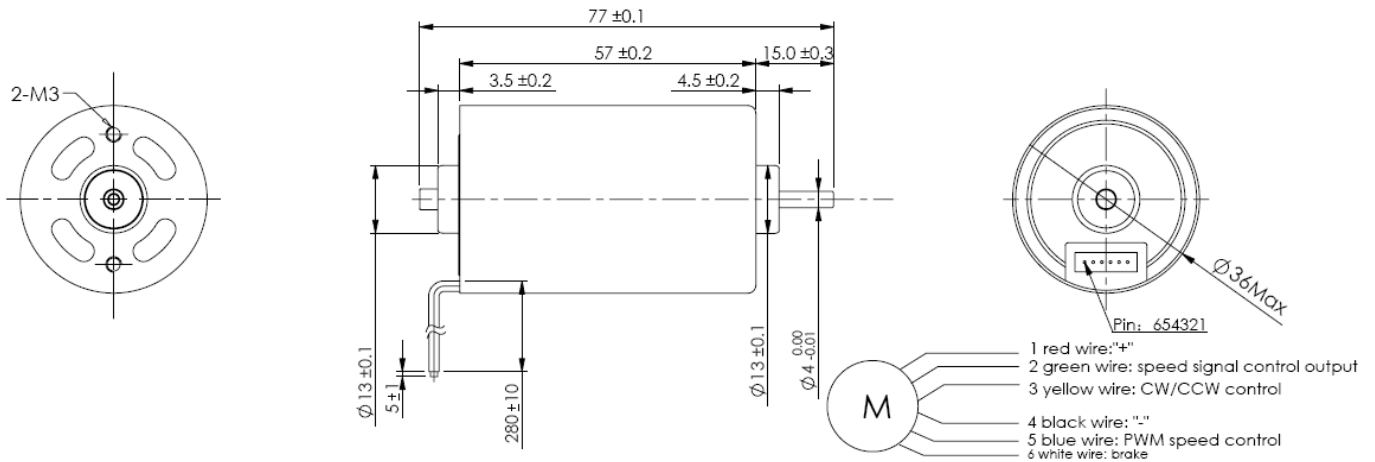

Performance Curve:

B3657M-S02

12V

B3657M-S03

24V

