

Description




Specification


Model	CAS1-NB01	CAS1-NB01M
Rated Supply Voltage	AC/DC100-240V 50/60Hz, DC24V	
Repetitive error	The range of time delay > 1s, Er ≤ 1%, The range of time delay < 1S, Dr ≤ 50ms	
Time range	0.001s~999h	
Operating mode	A, A1, A2, A3, B, B1, D, E, F	
Rated Load of the Contact	3A AC220V(Resistive)	
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)	
Display	LCD Digital display	
Power consumption	≤ 4VA	
Output time T	0.1s~99.9s	
Ambient Temperature	-5°C~40°C (with no icing or condensation)	
Ambient Humidity	RH35%~85%	
Altitude	≤ 2000m	
Installation	Flush mounting, Surface mounting, 35mm DIN Rail	Flush mounting
Weight	About 0.16Kg	

Wiring Diagram


CAS1-NB01



CAS1-NB01M



Operating mode

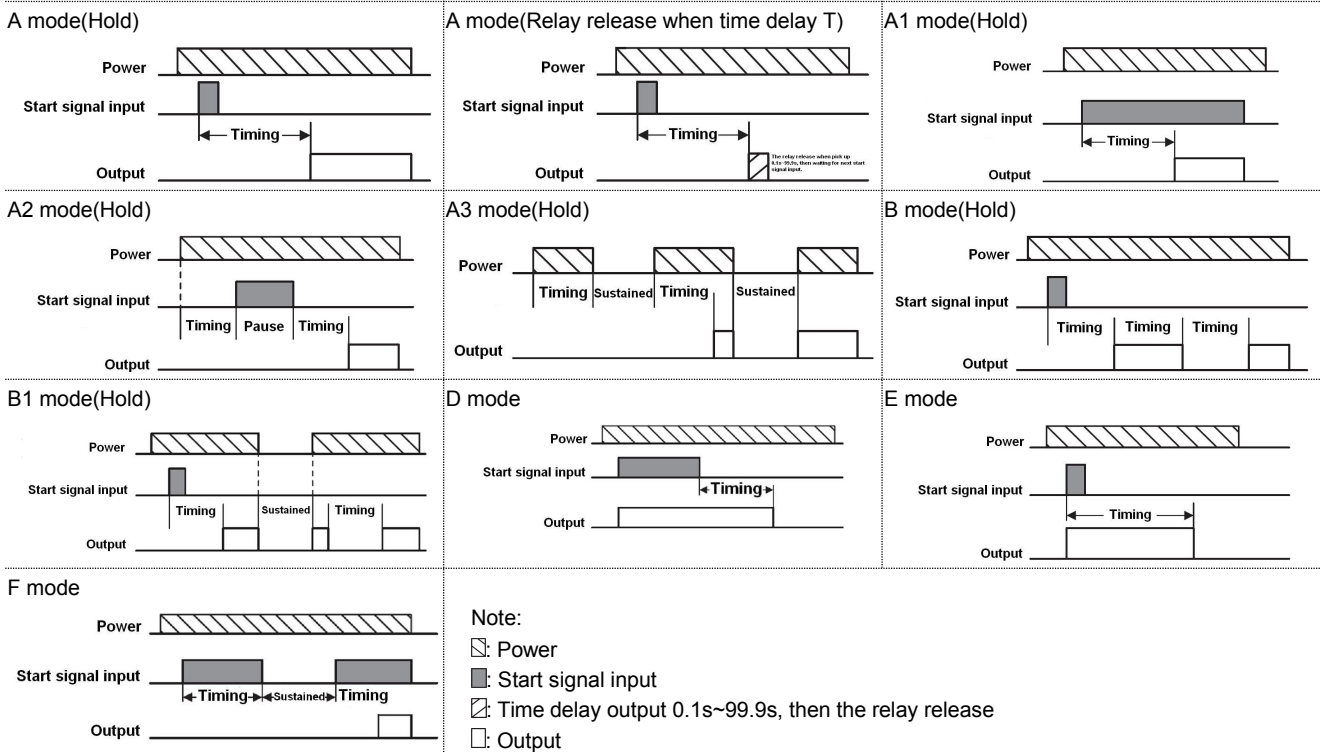

Dimension(mm) and Installation(mm)

