

Ethernet magnetic Transformers




KLS12-TFR-001 100 Base

Electrical Specifications:

- Designed to meet IEEE 802.3 requirements.
- IEEE 802.3at/ANSI X3.263 compliant performance.
- Storage temperature rang: e: -40~+80°C,90%RH
- RoHS compliant

Electrical Specification@25°C Operating Temperature -40 to + 85°C							
Part NO	Trun Ratio (±3%)		OCL primary@ 100KHz, 0.1Vrms, 15mA	Leakage primary@ 10KHz, 0.1Vrms	Cww (Pri.:Sec.)	DCR (Ω)	
	TX	RX				Primary	Secondary
KHX1631SR	1CT:1CT	1CT:1CT	350uH Min	0.5uH max	35pF Max	0.9 Max	1.2 Max

Electrical Specification@25°C Operating Temperature 0 to +70°C									
Part NO	Insertion loss (dB max) 1-100MHz	Return loss(dB min) MHz				DMRR (dB min .) MHz		Crosstalk (dB min .) MHz	Isolation Voltage (Vrms min)
		1-30	40	50	60-100	1-60	60-100	1-100	
KHX1631SR	-1.0	-18	-16	-16	-10	-35	-30	-33	1500

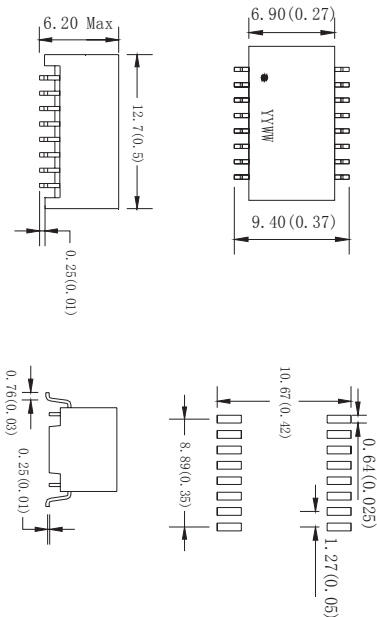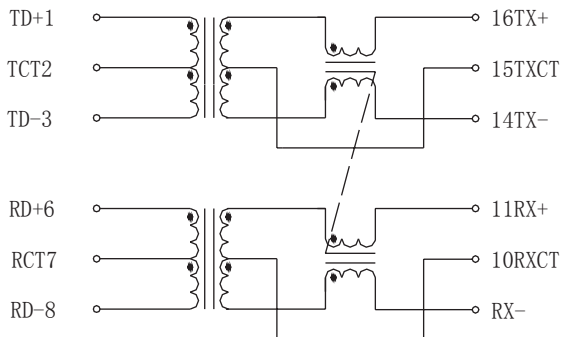

ORDER INFORMATION

KLS12-TFR-001

Part Number