


PCB LAYOUT

Material
 Pin header: Brass, Tin plated
 Housing: PBT, UL 94V-0

Electrical
 Rated voltage: 300V
 Rated current: 10A
 Contact Resistance: 20 m Ω
 Insulation resistance: 500M Ω /DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -30 °C ~ +105 °C
 Soldering: 250 °C 5Sec. Max.

Order Information

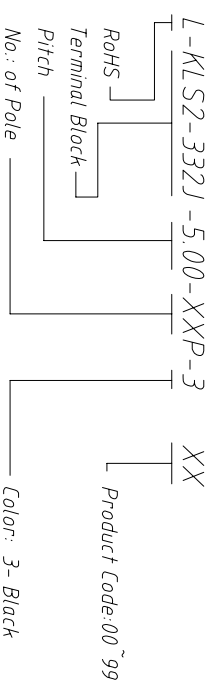

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ± 0.60	.X: ± 0.36	X: $\pm 5^\circ$.X: $\pm 3^\circ$	UNITS	SHEET SIZE	
.XX: ± 0.25		.XX: $\pm 2^\circ$		mm	A4	Screw CONN TERM BLOCK 5.00MM
					KLS P/N:	
Draw by: Date		2015-09-01		KLS ELECTRONIC CO., LTD.		
Check by: Date		2015-09-15				
SCALE	SHEET	OF				