


Material
 Screw: M2, Steel, Zn plated
 Shrapnel: Phosphor bronze, Nickel plated
 Clamp: Brass, Nickel plated
 Housing: PBT, UL 94V-0

Electrical
 Rated voltage: 300V
 Rated current: 8A
 Wire range: 28~16AWG 15mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC1500V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 0.4 N.m (3.5Lb. in)
 Strip length: 4.5~5 mm

Order Information

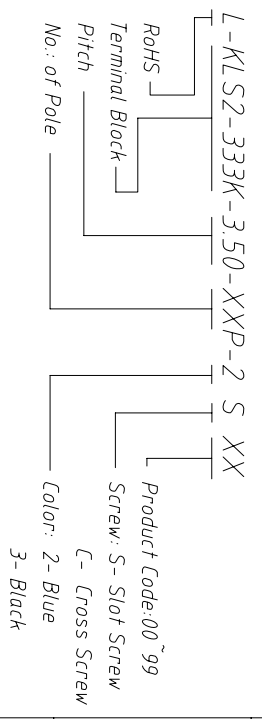

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.60	.X ±0.38	.XX ±0.25	X. ±5°	.X ±3°	.XX ±2°	
Draw By: Date			2015-09-01			
Check By: Date			2015-09-15			
SCALE	SHEET	OF				

UNITS	SHEET SIZE	KLS P/N:	Description:
mm	A4	KLS2-333K-3.50-XXP-2S	Screw CONN TERM BLOCK 3.50MM

KLS ELECTRONIC CO., LTD.