


**SECTION A-A**

**Material**  
 Shrapnel: Stainless steel  
 Pin header: Brass, Tin plated  
 Housing: PA66, UL94V-0

**Electrical**  
 Rated voltage: 150V  
 Rated current: 5A  
 Wire range: 26~18AWG 1.0mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC1300V / 1 min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Soldering: 250 °C ±5 °C for 5S  
 Strip length: 9~10 mm

**Order Information**

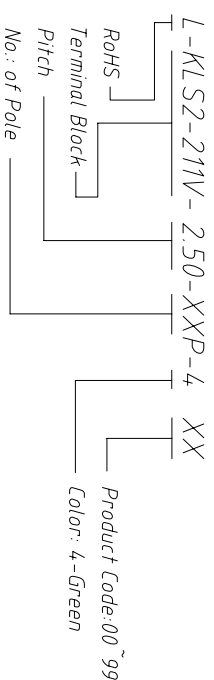

**PCB LAYOUT**

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X: ±0.60	.X: ±0.38	.XX: ±0.25	X: ±5°	.X: ±3°	.XX: ±2°		UNITS
Draw By: Date			2015-09-01		mm		Spring Clamp Terminal Block 2.50mm
Check By: Date			2015-09-15		A4		
SCALE			SHEET		OF		KLS ELECTRONIC CO., LTD.