
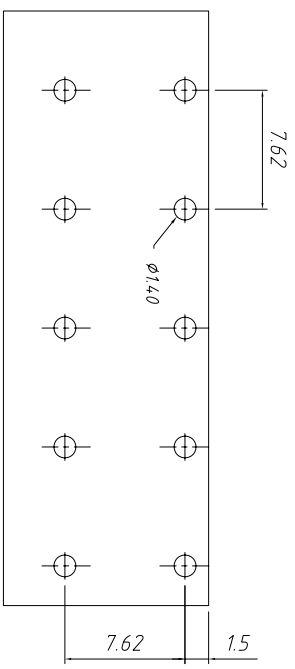


SECTION A-A


Material
 Strapsnel: Stainless steel
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0

Electrical
 Rated voltage: 300V
 Rated current: 10A
 Wire range: 22~16AWG 1.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250°C ±5°C for 5S
 Strip length: 9~10 mm

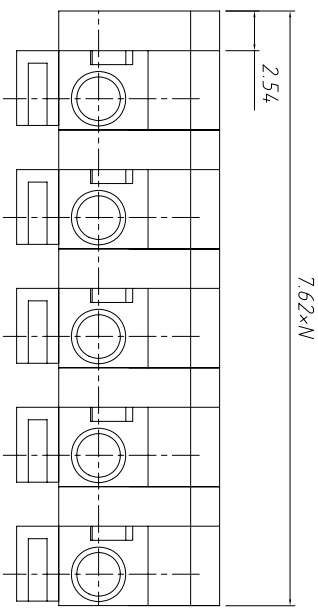

Order Information

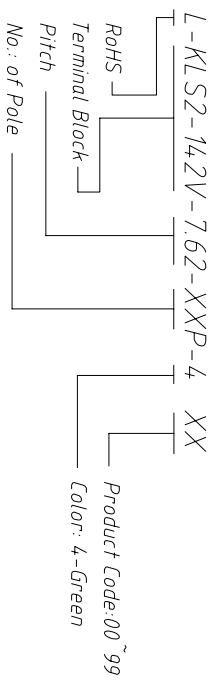

PCB LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X. ±0.60	X. ±5°	mm	⊕	UNITS		Spring Clamp Terminal Block 7.62mm	
X. ±0.38	X. ±3°	A4		SHEET SIZE			
XX ±0.25	XX ±2°	KLS P/N:					
Draw By: Date		2015-09-01		KLS2-14.3V-7.62-XXP			
Check By: Date		2015-09-15					
SCALE	SHEET	OF					

KLS ELECTRONIC CO., LTD.