



B type PCB LAYOUT

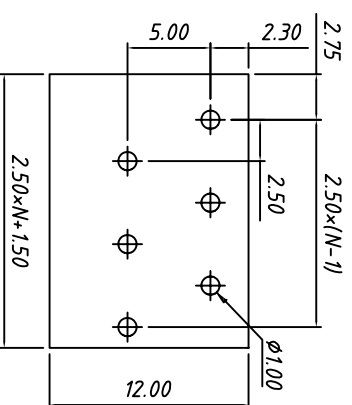

A type PCB LAYOUT

Material
Pin header: Phosphor bronze, Tin plated
Housing: PA66, UL94V-0
Electrical
Rated voltage: 300V
Rated current: 4A
Wire range: 28~20AWG 0.5mm²
Contact resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1min
Mechanical
Temp. Range: -40 °C ~ +105 °C
Soldering: 250 °C±5 °C for SS
Strip length: 9~10 mm

Order Information

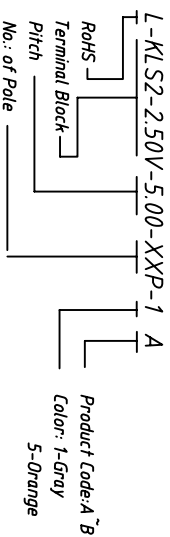

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	SCALE
X. ±0.60	X. ±5°	.XX ±2°	mm
X ±0.38	.X ±3°	PROJECTION	SHEET SIZE
XX ±0.25		UNITS	A4
Draw by 2015-09-01			
Check by 2015-09-15			

Description:

Spring Clamp Terminal Block 2.50mm

KLS P/N: KLS2-2.50V-5.00-XXP-1x

KLS ELECTRONIC CO., LTD.