


Material
Housing: PA66, UL94V-0
Pin header: Brass, Tin plated
Wire guard: Stainless steel

Electrical

Rated voltage: 300V
Rated current: 15A
Wire range: 28 ~ 2AWG 2.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1min

Mechanical
Temp. Range: -40 °C ~ +105 °C
Soldering: 250 °C ± 5 °C for SS
Strip length: 5 ~ 6 mm

Order Information

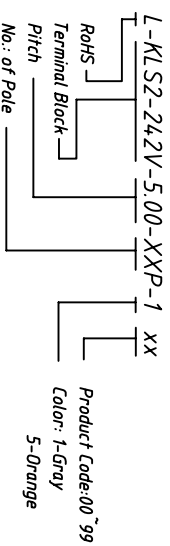

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	UNITS	SHEET SIZE
X. ±0.60	X. ±5°	.XX ±2°	mm	A4
X ±0.38	.X ±3°			
XX ±0.25				
Draw by 2015-09-01				
Check by 2015-09-15				

Description: Spring Clamp Terminal Block 5.00mm

KLS P/N: KLS2-242V-5.00-XXP-1

KLS ELECTRONIC CO., LTD.

PCB LAYOUT