


Material
 Screw: M3.0, Steel, Ni Plated
 Pin header: Brass, 0.8t, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Wire range: 22~14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 0.5Nm (4.5Lb.in)

Order Information

L-KLS2- 25 C - 6.72-XXP-B

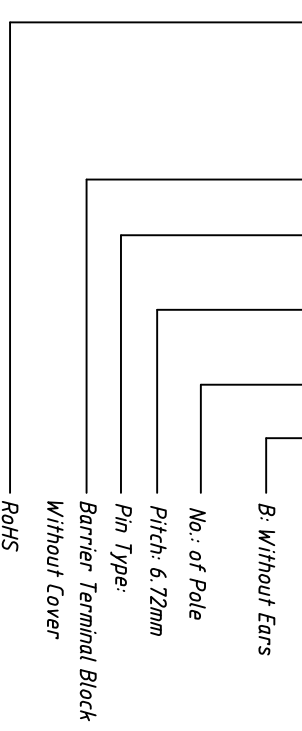

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X: ±0.60		X: ±5°		UNITS	mm		Barrier TERM BLOCK 6.72MM
.X ±0.38		.X ±3°		SHEET SIZE	A4		
.XX ±0.25		.XX ±2°		KLS P/N:		KLS2-25C-6.72-XXP-B	
Draw by: Date		2015-09-01					
Check by: Date		2015-09-15					
SCALE		SHEET		OF			

KLS NingBo KLS ELECTRONIC CO.,LTD.