


Material
 Screw: M3.0, Steel, Ni Plated
 Pin header: Brass, 0.8t, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Wire range: 22 ~ 14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 0.5Nm (4.5Lb.in)

Order Information

L-KLS2- 25 A - 7.62-XXP-A

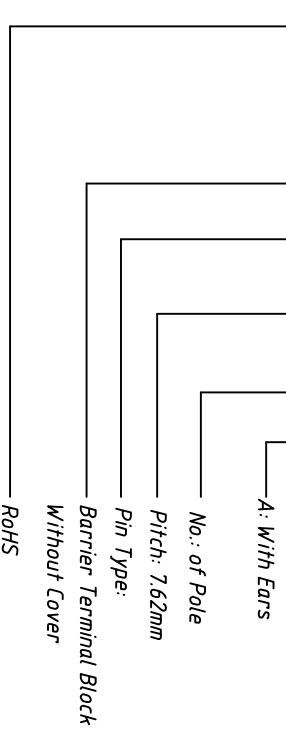

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°	
			mm		Barrier TERM BLOCK 7.62MM	
			A4		KLS P/N:	
			KLS P/N:		KLS2-25A-7.62-XXP-A	
Draw by: Date		2018-02-26				
Check by: Date		2018-02-26				
SCALE		SHEET		OF		



NingBo KLS ELECTRONIC CO., LTD.