
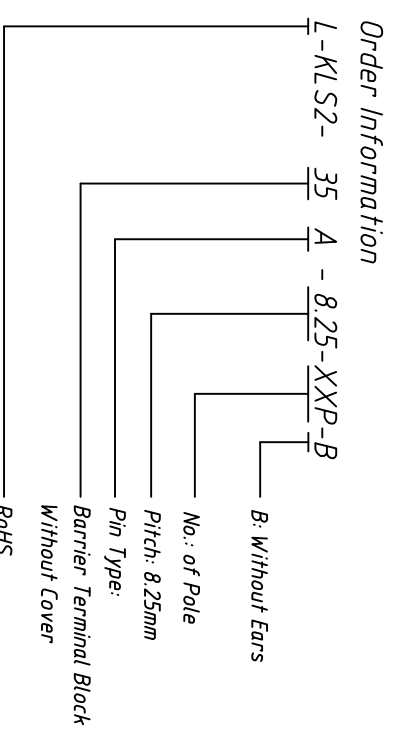


SECTION A-A

Material
 Screw: M3.0, Steel, Ni Plated
 Pin header: Brass, 0.8t, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Wire range: 22~14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 0.5Nm (4.5Lb.in)

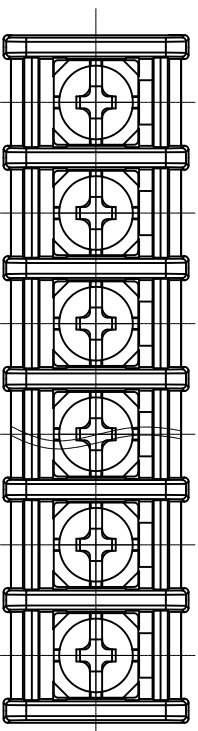

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	.X ±0.38	X: ±5°	.X ±3°	UNITS	mm	
.XX ±0.25	.XX ±2°			SHEET SIZE	A4	Barrier TERM BLOCK 8.25MM
				KLS P/N:	KLS2-35A-8.25-XXP-B	
Draw by: Date	2018-02-26					
Check by: Date	2018-02-26					
SCALE	SHEET	OF				



NingBo KLS ELECTRONIC CO., LTD.