


**Material**  
 Screw: M3.0, Steel, Ni Plated  
 Pin header: Brass, 0.8t, Tin Plated  
 Housing: PA66, UL94V-0,Black

**Electrical**  
 Rated voltage: 300V  
 Rated current: 15A  
 Wire range: 22~14AWG 2.5mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Torque: 0.5Nm (4.5Lb.in)

*Order Information*

L-KLS2-35 A - 8.25-XXP-A

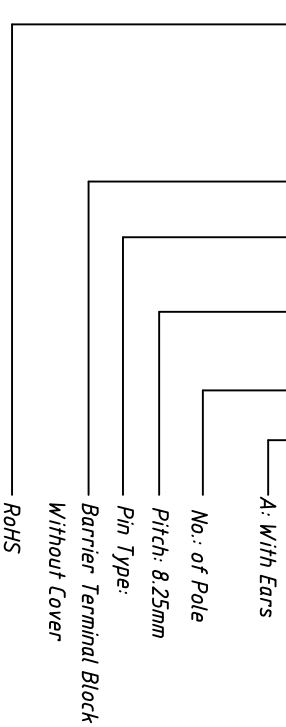

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°	
Draw by: Date	2018-02-26					Barrier TERM BLOCK 8.25MM KLS2-35A-8.25-XXP-A
Check by: Date	2018-02-26					
SCALE	SHEET	OF				



Ningbo KLS ELECTRONIC CO., LTD.