


**Material**  
 Screw: M3.0, Steel, Ni Plated  
 Pin header: Brass, 0.8T, Tin Plated  
 Housing: PA66, UL94V-0,Black

**Electrical**  
 Rated voltage: 300V  
 Rated current: 15A  
 Wire range: 22~14AWG 2.5mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Torque: 0.5Nm (4.5Lb.in)

**Order Information**

L-KLS2-48 R - 7.62-XXP-A

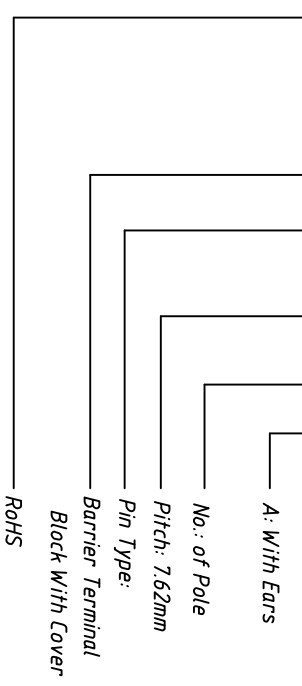

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X: ±0.60	X: ±5°	mm	Barrier TERM BLOCK 7.62MM
.X ±0.38	.X ±3°	A4	
.XX ±0.25	.XX ±2°	KLS P/N:	

Draw by: Date	2015-09-01	KLS2-48R-7.62-XXP-A
Check by: Date	2015-09-15	
SCALE	SHEET	OF

**KLS** NingBo KLS ELECTRONIC CO.,LTD.