

**Material**  
 Screw: M4.0, Steel, Ni Plated  
 Pin header: Brass, 0.8T, Tin Plated  
 Housing: PA66, UL94V-0,Black


**Electrical**  
 Rated voltage: 300V  
 Rated current: 20A  
 Wire range: 22~12AWG 4mm<sup>2</sup>  
 Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Torque: 1.2 Nm (10.6 Lb. In)

**Order Information**

L-KLS2-48 A - 9.50-XXP-B

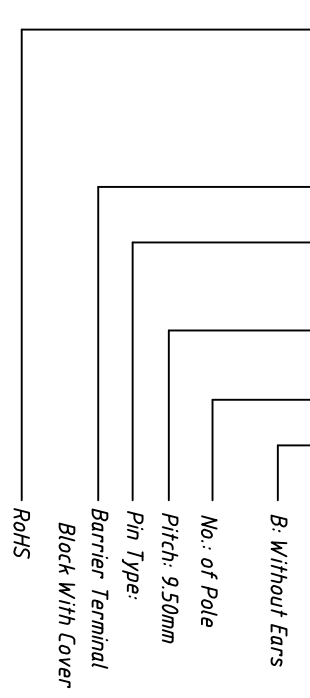

<b>GENERAL TOLERANCE</b>		<b>ANGLE TOLERANCE</b>		<b>PROJECTION</b>		<b>Description:</b>	
X. ±0.60		X. ±5°		UNITS	mm	Barrier TERM BLOCK 9.50MM	
.X ±0.38		.X ±3°		SHEET SIZE	A4		
.XX ±0.25		.XX ±2°		KLS P/N:	KLS2-48A-9.50-XXP-B		
Draw by: Date		2015-09-01		Ningbo KLS ELECTRONIC CO.,LTD.			
Check by: Date		2015-09-15					
SCALE	SHEET	OF					

