

SECTION A-A



Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 10T, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 600V
 Rated current: 40A
 Wire range: 18~10AWG 6mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2 Nm (10.6 Lb. In)

Order Information

L-KLS2-48 C-13.0-XXP-B

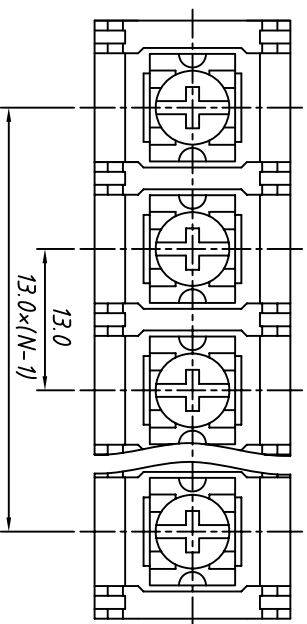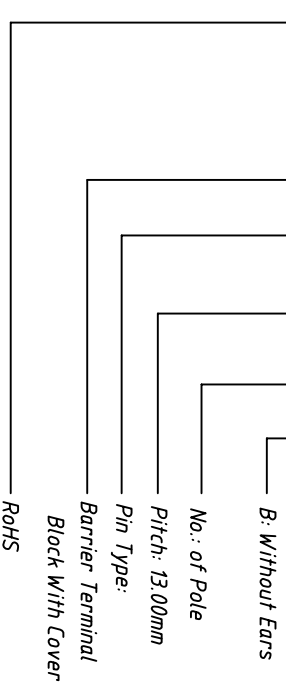

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X. ±0.60		X. ±5°		UNITS	mm	Barrier TERM BLOCK 13.0MM	
.X ±0.38		.X ±3°		SHEET SIZE	A4		
.XX ±0.25		.XX ±2°		KLS P/N:	KLS2-48C-13.0-XXP-B		
Draw by: Date		2015-09-01		NingBo KLS ELECTRONIC CO.,LTD.			
Check by: Date		2015-09-15					
SCALE	SHEET	OF					

