

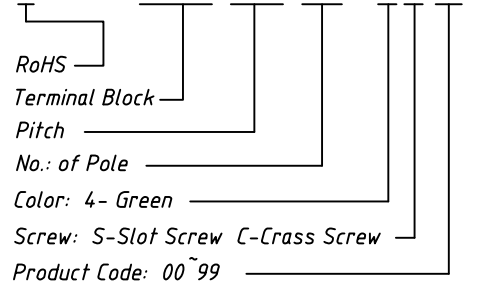
Material
 Housing: PA66, UL 94V-0
 Clamp: Phosphor bronze, Tin Plated
 Shrapnel: Stainless steel
 Screw: M3 Steel, Zn plated
 Fix screw: Steel, Zn plated



Electrical
 Rated voltage: 300V
 Rated current: 8A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min
 Wire Range: 24 ~ 16AWG 1.0mm²

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Strip length: 9 ~ 10mm

Order Information

L-KLS2-FME-3.50-XXP-4S00



GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	
X. ±0.60		X. ±5°		Plug-in TERM BLOCK 3.50MM	
.X ±0.38		.X ±3°		KLS P/N:	KLS2-FME-3.50-XXP-4S-00
.XX ±0.25		.XX ±2°		 NingBo KLS ELECTRONIC CO.,L TD.	
Draw by	2015-09-01	PROJECTION			
Check by	2015-09-15	UNITS	mm		
SCALE		SHEET SIZE	A4		