


Electrical :
Rated Voltage: 450V(IEC/ENI/300V(UL))
Rated Current: 16A
Contact resistance: 20 m Ω
Insulation resistance: 5000M Ω /DC1000V
Withstanding voltage : AC2500V/1 min
Cross Section: Solid conductor & Stranded conductor
A holes: 0.5-2.5mm²/14-20AWG
B holes: 0.5-1.5mm²/16-20AWG
C holes: 0.5-2.5mm²/14-20AWG


Materials
Insulation Materials: PA 66,WHITE,UL94V-2
Contact: Copper,Nickel Plated
Wire guard : Stainless steel

Number of poles: 2 poles
Strip length : 8-10mm
Operating Temperature: -40°C ~ +105°C

ORDER INFORMATION

L-KLS2- 238M - 02P X A

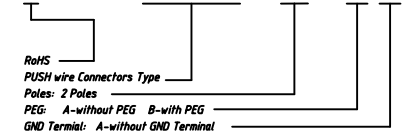

GENERAL TOLERANCE		ANGLE TOLERANCE	PROJECTION	Description:
X. ± 0.60	$\pm 2^\circ$	UNITS	mm	PUSH wire Connector
.X ± 0.38		SHEET SIZE	A4	
.XX ± 0.25		KLS P/N:		L-KLS2-238M-02Pxx
Draw: Daniel	2018-08-27	 NingBo KLS ELECTRONIC CO.,L TD.		
Check: Daniel	2018-08-27			
SCALE	SHEET			