


RECOMMENDED PCB LAYOUT
TOP VIEW (.XX ±0.05)

Prohibited area
 Solder area

Material:
 Housing: High Thermoplastic, UL 94V-0, Black.
 Contact: Copper Alloy.
 Shell: Stainless Steel.

Finish:
 Contact: Gold Over Nickel.
 Shell: Nickel Over All Over.

Electrical:
 Operating Voltage: 30V
 Current Rating: 0.5 A.
 Operating Temperature: -20°C TO +85°C.

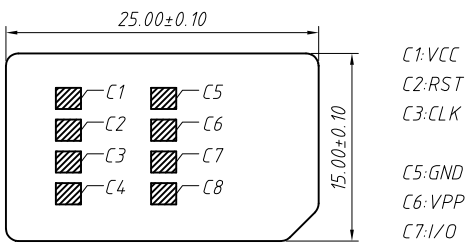

REFERENCE SIM CARD PLUG

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	Description:
X. ±0.15	.X ±0.03	X. ±5°	.X ±3°	UNITS	
.XX ±0.05		.XX ±2°		SHEET SIZE	
				KLS P/N:	
Draw by:	Jenny	Date:	2018-03-10	NingBo KLS ELECTRONIC CO., L TD.	
Check by:		Date:	2018-03-10		
SCALE		SHEET	1 OF 1		