




PIN NO.	PIN ASSIGNMENT
1 #	DAT2
2 #	CD/DAT3
3 #	CMD
4 #	VDD
5 #	CLK
6 #	VSS
7 #	DAT0
8 #	DAT1

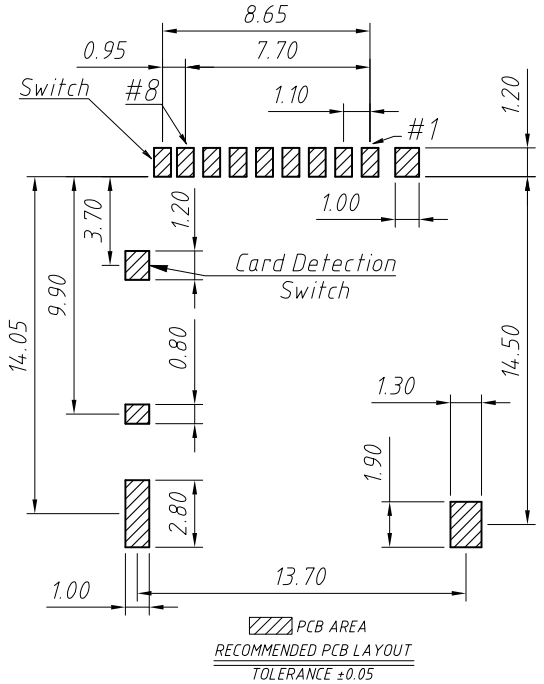

Material:
 Insulator: Hi-Temperature Plastic, UL 94V-0, Black.
 Terminal: Copper Alloy, Gold flash plating on contact area & solder tail.
 Shell: Stainless Steel, Nickel underplated on allover, gold flash on solder tail.

Electrical:
 Insulation Resistance: 1000M Ω Min./500V DC
 Withstanding Voltage: 250V AC/minute.
 Contact Resistance: 100m Ω Max. AT 20mA/20mV Max
 Current Rating: 0.5 A
 Voltage Rating: 5.0 vrms
 Operating Temp Range: -40°C TO +85°C
 Mating Cycles: 5000 Insertions.

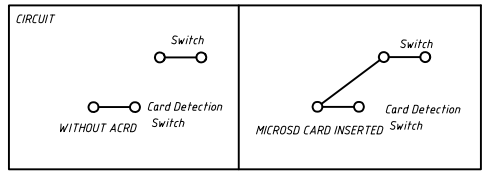

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ± 0.15	X. $\pm 5^\circ$	UNITS	Micro SD Card CONN; PUSH/ PUSH, H1.68mm, SMD with CD Pin L-KLS1-SD114-R
.X ± 0.03	.X $\pm 3^\circ$	SHEET SIZE	
.XX ± 0.05	.XX $\pm 2^\circ$	KLS P/N:	
Draw by: Jenny	Date: 2018-03-10	 NingBo KLS ELECTRONIC CO., L TD.	
Check by:	Date: 2018-03-10		
SCALE	SHEET 1 OF 1		