


PCB Layout Top View

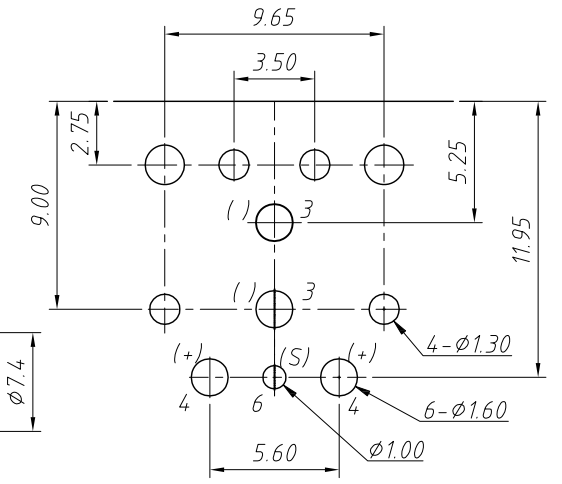

**SPECIFICATION**  
 Rated Load:DC 20V 10A  
 Contact resistance:30mΩ, max  
 Insulation resistance:100MΩ, min  
 Withstand Voltage:AC150V  
 Actuating Force:3-30N  
 Life:5000 cycles  
 Operating Temperature:-25°C-85°C

NO.	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Cover	1	PA9T	---
3	Spring Piece	1	Bronze	Au-Plating
4	Spring Piece	1	Bronze	Au-Plating
5	Coat	1	Brass	Ni-Plating
6	PIN	1	Bronze	Au-Plating

GENERAL TOLERANCE	PROJECTION		Description:
.X ±0.50	UNITS	mm	20V 10A DC Jack DIP
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-MDC-049
.X ±5°	Date	2019-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°	SHEET	1 OF 1	
.XX ±2°			