

# CRYSTAL UNIT

## KLS14-MC2012

### Application

- Small Communications Devices

### Features

- Dimensions (2.0x1.2x0.6mm)
- Excellent Reliability Performance.




### Specifications




Model	KLS14-MC2012
Nominal frequency range	32.768KHz
Level of drive	0.5μW max.
Storage temperature range	-55°C~+125°C
Operating temperature range	-40°C~+85°C
Turnover temperature	-25 ± 5°C
Parabolic coefficient	-0.04×10 <sup>-6</sup> /°C <sup>2</sup> Max.
Frequency tolerance (at +25°C)	± 20×10 <sup>-6</sup> , or specify
Equivalent series resistance	90KΩ max.
Load capacitance	12.5pF, or specify
Shunt capacitance	1.3pF max.

Package quantity: 3,000pcs /Reel


### Outline and Dimensions [unit:mm]

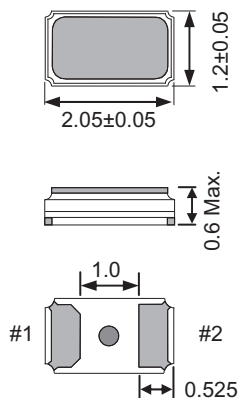

Footprint (Recommended)



TOP VIEW



### ORDER INFORMATION

L-KLS14-MC2012-XXXX-XX-XX-X

