


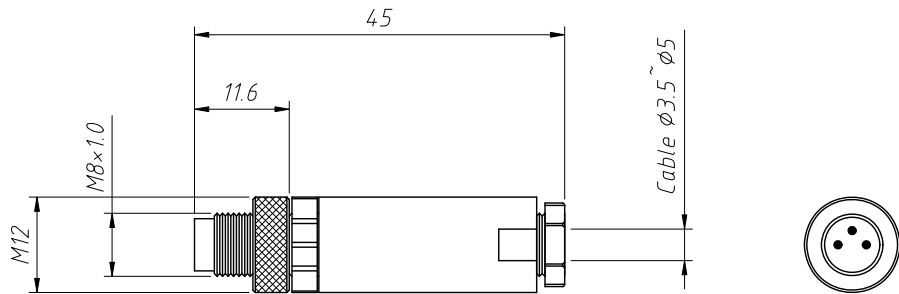



1
RoHS Compliance



L-KLS15-M8A-P103



L-KLS15-M8A-P104



M8 Wire Locking Wrench

Material:

Insulation: PBT/PA, UL 94V-0, Black.

Connector Pin: Brass, 0.025u" Gold plated

Nut/Screw: Brass, Nickel plating

Electrical Characteristics:

Rated current: 4A

Rated voltage: 03Pin 60V, 04Pin 30V

Contact Resistance: 3mΩ Max

Mechanical properties:

IP rating: IP67


Wire gauge: 20~26AWG / 0.14~0.50mm²

Mechanical characteristics: mating/cycle > 100 cycle

Operating Temperature: -40°C ~ +85°C

Order Information:

L-KLS15-M8A-P103

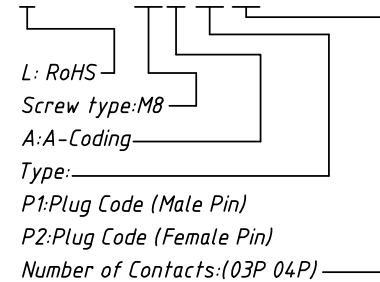

L: RoHS

Screw type: M8

A: A-Coding

Type:

P1: Plug Code (Male Pin)

P2: Plug Code (Female Pin)

Number of Contacts: (03P 04P)

ANGLE TOLERANCE	PROJECTION		Description:
±3°			M8 IP67 Waterproof circular plug male connector
GENERAL TOLERANCE	UNITS	mm	KLS P/N: L-KLS15-M8A-P103
x.x ±0.30	SHEET SIZE	A4	NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	Daniel 2022-04-01	
x.xxx ±0.10	Check:	Daniel 2022-04-01	