

Electrical Characteristics

Plastic: black high temperature UL94V-0;

Terminal: copper alloy

Contact Resistance: 20mΩ max.


Insulation Resistance: 1000MΩ min






Current Rating: 2A

Dielectric withstanding voltage: AC 500V(r.m.s) /60s

Operating temperature: -55°C ~ +125°C

Product temperature resistance: 260±5°C 10S

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X	±0.15	X	±5°	UNITS	mm	Smart Card Connector PUSH PULL, 8P+2P L-KLS1-ISC-F007E-S	
X	±0.03	X	±3°	SHEET SIZE	A4		
XX	±0.05	XX	±2°	KLS P/N:			
Draw by:	Jenny	Date:	2018-11-01	 NingBo KLS ELECTRONIC CO.,L TD.			
Check by:		Date:					
SCALE		SHEET	1 OF 1				

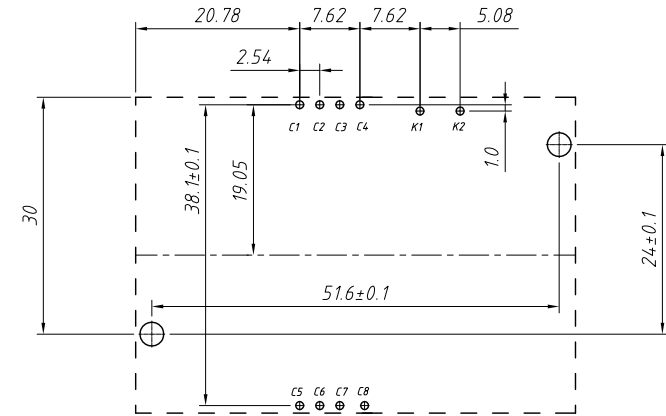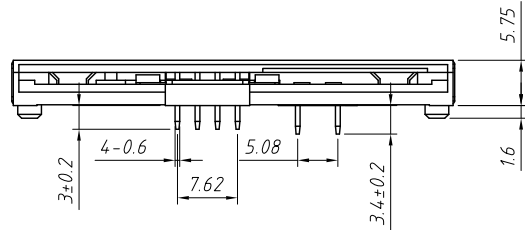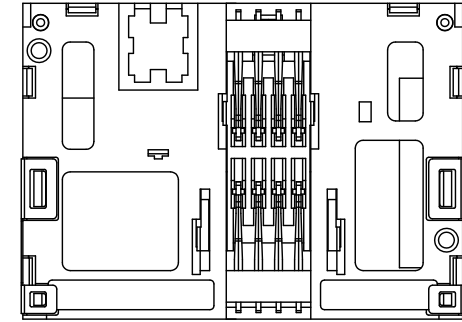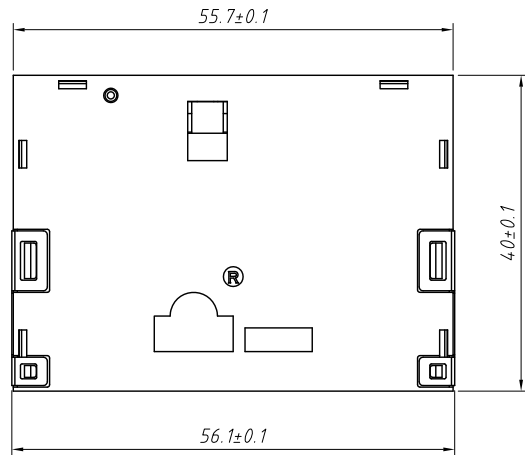

Electrical Characteristics

Plastic: black high temperature UL94V-0;

Terminal: copper alloy

Contact Resistance:20mΩ max.


Insulation Resistance:1000MΩ min

Current Rating: 2A

Dielectric withstanding voltage:AC 500V(r.m.s) /60s

Operating temperature: -55°C ~ +125°C

Product temperature resistance: 260±5°C 10S

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X	±0.15	X	±5°	UNITS	mm	Smart Card Connector PUSH PULL,8P+2P L-KLS1-ISC-F007E-R	
X	±0.03	X	±3°	SHEET SIZE	A4		
XX	±0.05	XX	±2°	KLS P/N:			
Draw by:	Jenny	Date:	2018-11-01	 NingBo KLS ELECTRONIC CO.,L TD.			
Check by:		Date:					
SCALE		SHEET	1 OF 1				